



NON TOXIC



LIGHT WEIGHT



VERSATILE

LDX

LEAD ALTERNATIVE

VERSATILE LDX


LEAD ALTERNATIVE



Versatile LDX is a lead-free innovation that replaces the traditional lead based flashings. LDX superior features incorporate a cleverly designed mesh that is free from toxic materials and is much lighter than lead based flashings, making LDX easier to use and install with minimal tools required.

Benefits

- An alternative to lead flashings
- Non-toxic – Unlike traditional lead flashings, Versatile LDX does not contain any heavy metals
- Light weight – Versatile LDX is much lighter than lead pipe flashings and therefore easier to use
- 20 year warranty
- UV rated
- Available in single packs and five packs

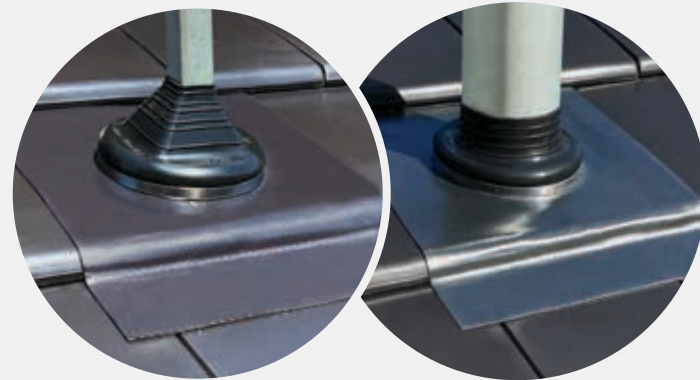

VLDXBQ40-100

VLDXB100-150


Versatile LDX Range

Versatile LDX	Black EPDM Code	Red Silicone Code	Metric: Pipe Size (25° roof pitch)	Metric: Pipe Size (45° roof pitch)	Imperial: Pipe Size (25° roof pitch)	Imperial: Pipe Size (45° roof pitch)	Base size
No. 1 (Small)	VLDXB5-40S	VLDXR5-40S	5-50mm	5-40mm	½" - 2"	½" - 1½"	300x450mm
No. 1	VLDXB5-40	VLDXR5-40	5-50mm	5-40mm	½" - 2"	½" - 1½"	400x500mm
No. 2	VLDXB12-125	VLDXR12-125	12-125mm	12-90mm	½" - 5"	½" - 3½"	400x500mm
No. 2 (Pre-Cut)	VLDXB50-90	VLDXR50-90	50-90mm	50-65mm	2" - 3½"	2" - 2½"	400x500mm
No. 3	VLDXB100-150	VLDXR100-150	100-150mm	100-110mm	4" - 6"	4" - 4½"	400x500mm
No. 7	VLDXB150-300	VLDXR150-300	150-300mm	150-255mm	6" - 11½"	6" - 10"	600x850mm
No. 3 (Square)	VLDXBQ40-100	NA	40-100mm	40-75mm	1½" - 4"	1½" - 3"	400x500mm


EPDM will withstand constant temperatures of -40°C (-40°F) to 115°C (239°F) Silicone will withstand constant temperatures of -50°C (-58°F) to 200°C (392°F)

Installation

Versatile LDX is installed in the exact same way as all other lead based tiled roof flashings.

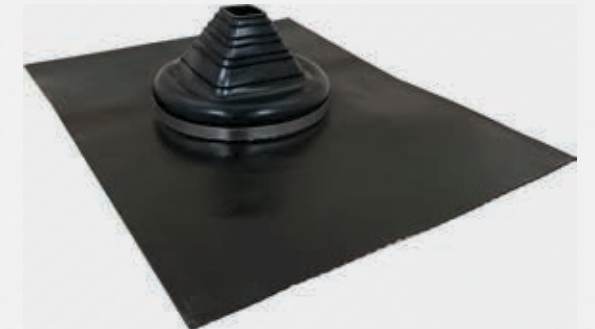

Installation Overview

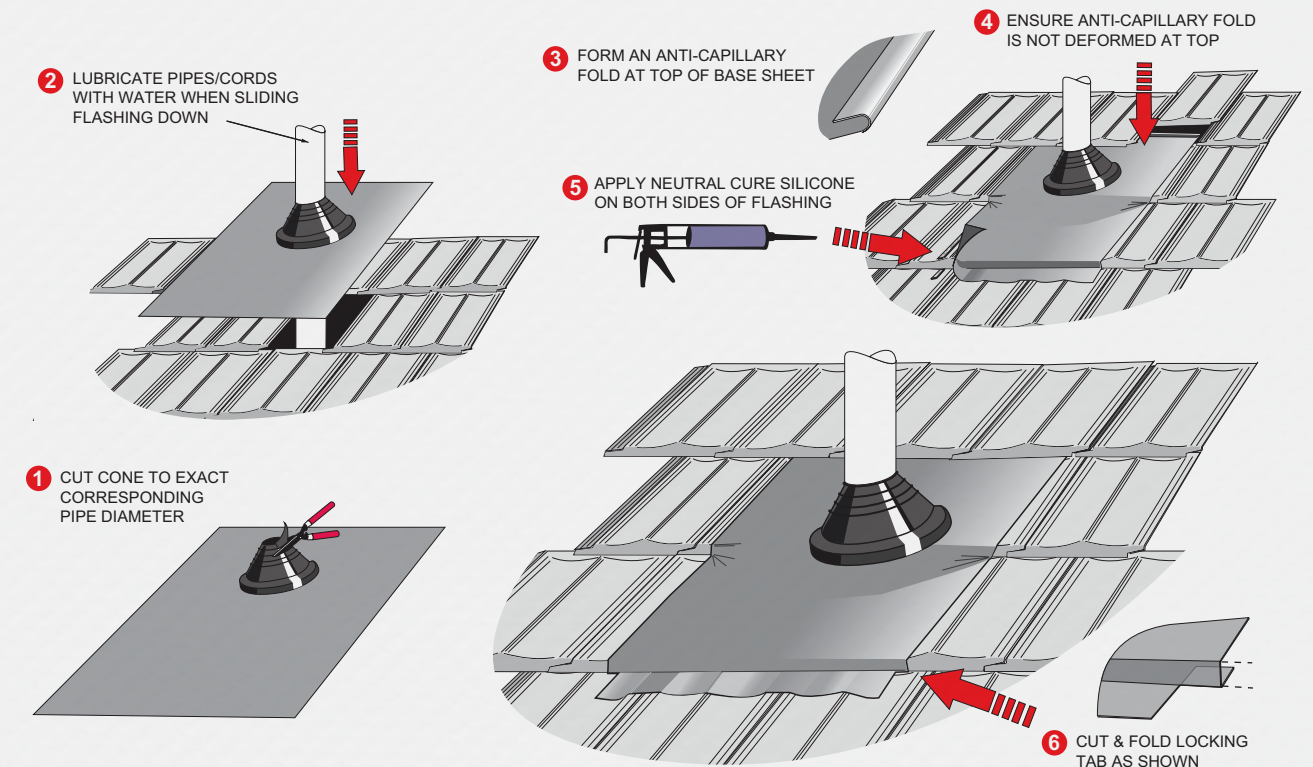



AQUARIUS

DISTRIBUTION

Tel: (+613) 9763 0044

Fax: (+613) 9764 1266

Email: sales@aquariusdist.com.au

www.aquariusdist.com.au